

01-27-00

A

Express Mail Label No. EL014418097US

01/25/00

364 U.S. PTO

**UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
49543(904)Total Pages in this Submission
44**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

LIQUID CRYSTAL DISPLAY DEVICE

and invented by:

TAKUYA NOGUCHI, KAZUYA YOSHIMURA00/55/10
59516450
U.S. PTOIf a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 31 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
49543(904)

Total Pages in this Submission
44

Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☒ Formal Number of Sheets 13
- b. ☐ Informal Number of Sheets _____
4. ☒ Oath or Declaration
- a. ☒ Newly executed (original or copy) ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail (Specify Label No.): EL014418097US

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
49543(904)

Total Pages in this Submission
44

Accompanying Application Parts (Continued)

15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)
Certified Copies of Japanese Patent Application Nos. 11-021042, Filed 1/29/99
and 11-308130, Filed 10/29/99
16. ☐ Additional Enclosures (please identify below):

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	12	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	3	- 3 =	0	x \$78.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
OTHER FEE (specify purpose)		Assignment Recordal			\$40.00
TOTAL FILING FEE					\$730.00

- ☒ A check in the amount of \$730.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 04-1105 as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).


Signature

Dated: January 25, 2000

David G. Conlin
Reg. No. 27026
Dike, Bronstein, Roberts & Cushman, LP
130 Water Street
Boston, MA 02109
617-523-3400

CC:

LIQUID CRYSTAL DISPLAY DEVICE

FIELD OF THE INVENTION

The present invention relates to a liquid crystal display device which is used for a display of OA equipment, AV equipment, and the like, and particularly concerns a liquid crystal display device which is suitable for use outdoors or in an automobile occasionally at a high temperature.

BACKGROUND OF THE INVENTION

With respect to a specification of a liquid crystal display device required for portable equipment, the demand has been growing for a liquid crystal display device which is thin and lightweight with a wide range of an operating

temperature. The operating temperature of the liquid crystal display device generally needs to be set between -20 and 70°C in view of using outdoors or in an automobile.

Further, in order to realize a liquid crystal display device which is thin and lightweight, a liquid crystal display device has been proposed, in which an insulating substrate has a smaller thickness or a plastic substrate is used.

For instance, in such a liquid crystal display device, two insulating substrates are overlaid to each other via plastic spacers such that a display electrode formed by a transparent conductive film opposes a surface, on which an alignment film and the like are stacked, the substrates are bonded to each other via a sealing material placed on a circumference between the substrates, liquid crystal is filled into a gap between the substrates from an inlet formed on a portion of the sealing material, the inlet is filled with a sealing material made of resin and others, and polarizers are disposed outside the substrates.

After filling liquid crystal from the inlet, when the inlet is sealed with a sealing material such as an ultraviolet curing and thermosetting resin, a pressurized sealing method has been conventionally used, in which both surfaces of a liquid crystal cell are pressurized from the outside such that a liquid crystal layer has an even

thickness (cell gap) and the sealing operation is performed with the cell gap being set at a predetermined value. This method is performed for preventing an uneven display, which is caused by a difference in cell gaps.

The pressurized sealing method is disclosed in Japanese Unexamined Patent Publication No. 220546/1996 (Tokukaihei 8-220546, published on August 30, 1996), Japanese Unexamined Utility Model Patent Publication No. 33132/1993 (Jitsukaihei 5-33132, published on April 30, 1993), and others.

Japanese Unexamined Patent Publication No. 220546/1996 discloses a technique for setting a cell gap of the liquid crystal display device at a predetermined value by applying an even pressure to the outer surfaces of the substrates so as to expel excessive liquid crystal.

Japanese Utility Model Patent Publication No. 33132/1993 discloses a technique for eliminating a cell gap difference between a display area and a circumference of the display area that has no electrode, by pressurizing merely an area corresponding to the display area.

Meanwhile, as a method for eliminating an irregular display color resulted from a temperature distribution that is caused by heat conduction from a light source or the outside of a driving circuit, Japanese Unexamined Patent Publication No. 292412/1996 (Tokukaihei 8-292412, published on November 5, 1996) discloses a method for partially

changing a cell gap of the liquid crystal display device in accordance with a temperature distribution such that $d\Delta n$ (product of an index anisotropy Δn and a cell gap d) is substantially even.

In the above liquid crystal display devices, it is possible to realize a uniform cell gap so as to provide an even display at room temperature without causing an irregular display color.

As shown in Fig. 12, a liquid crystal cell 51 does not cause an irregular display color at room temperature; however, an irregular display color 52, in which colors are faded to white, appears at a high temperature (60 - 70°C) in the center of the liquid crystal cell 51 when voltage is not applied. This phenomenon occurs in a portable liquid crystal display device such as a mobile phone and a PDA (Personal Digital Assistant), that occasionally operate at a low temperature and a high temperature (-20 - 70°C).

It is understood that an irregular display color appears at a high temperature due to irregular coefficients of thermal expansion, regarding main materials constituting a liquid crystal cell of Fig. 1. Namely, as shown in Fig. 13, the liquid crystal cell 51 has an even cell gap at room temperature, so that no irregular display color appears. However, in the case of a higher atmospheric temperature, the coefficient of thermal expansion of a liquid crystal 53

is larger by one digit than that of a sealing material 54, so that an expansion amount of the liquid crystal 53 is larger than that of the sealing material 54. Consequently, the center of the liquid crystal cell expands upward and downward, and the cell gap results in an irregular display color.

[Table 1]

Thermal Expansion Coefficient of Materials
(documentary records)

	thermal expansion coefficient	ratio
liquid crystal	7.2×10^{-4}	100.0
sealing resin	5.5×10^{-5}	7.6
plastic bead	8.5×10^{-5}	11.8
glass	4.5×10^{-6}	0.6

Further, the technic disclosed in Japanese Unexamined Patent Publication No. 292412/1996 is devised for responding to a refractive index Δn of the liquid crystal, that fluctuates in accordance with a partial temperature change caused by a certain heat source. In this technique, as shown in Fig. 14, a temperature distribution formed by the heat source is projected in advance and a cell gap thickness is changed in a target area. Therefore, this conventional art does not solve the influence of heat, that is caused by

a change in temperature and is exerted upon the entire liquid crystal cell 51. Thus, the center of the liquid crystal cell 51 expands upward and downward and a cell gap difference results in an irregular display color.

SUMMARY OF THE INVENTION

An object of the present invention is to provide a liquid crystal display device for preventing an irregular display color which appears in accordance with an ambient temperature varying from room temperature to a high temperature.

In order to solve the above problem, the liquid crystal device of the present invention, that includes a pair of insulating substrates bonded via a sealing material, and liquid crystal filled between a pair of the insulating substrates, is characterized in that a cell gap is formed so as to gradually increase from the center to an end of a display area at room temperature.

With this arrangement, a cell gap is formed so as to gradually increase from the center to an end of a display area at room temperature in a range that no irregular display appears. Hence, it is possible to smooth out a difference in thermal expansion between the liquid crystal and a sealing material when an atmospheric temperature rises, and it is possible to prevent a cell gap from being

too large in the center of the display area. Consequently, an irregular display color can be eliminated.

The liquid crystal display device of the present invention is effectively used for an STN liquid crystal display device, in which an operating temperature ranges from room temperature to a high temperature. Particularly, the aforementioned problem frequently appears at a high temperature. Therefore, a cell gap is formed so as to gradually increase from the center to an end of the display area at room temperature in a range that no irregular display color appears, so that it is possible to smooth out a difference in thermal expansion amounts between the liquid crystal and the sealing material at a high temperature. Consequently, an irregular display color can be prevented at a high temperature.

Here, in the present invention, a high temperature is, for example, an atmospheric temperature of about 60 to 70°C, and room temperature is an atmospheric temperature of about 25°C.

For a fuller understanding of the nature and advantages of the invention, reference should be made to the ensuing detailed description taken in conjunction with the accompanying drawings.

Fig. 1 is a sectional drawing showing a liquid crystal display device of the present invention at room temperature.

Figs. 2(a) through 2(e) are explanatory drawings showing a cell gap which changes in accordance with a fluctuation of an ambient temperature.

Fig. 3 is an explanatory drawing showing a manufacturing method of the liquid crystal display device of the present invention.

Fig. 4 is a graph showing a change in a cell gap relative to a temperature, regarding one example of the present invention.

Fig. 5 is a graph showing a change in a cell gap relative to a temperature, regarding another example of the present invention.

Fig. 6 is a graph showing a change in a cell gap relative to a temperature, regarding still another example of the present invention.

Fig. 7 is a graph showing a change in a cell gap relative to a temperature, regarding still another example of the present invention.

Fig. 8 is a graph showing a change in a cell gap relative to a temperature, regarding one comparative example.

Fig. 9 is a graph showing a change in a cell gap relative to a temperature, regarding another comparative

example.

Fig. 10 is a graph showing a change of a cell gap relative to a temperature regarding still another comparative example.

Fig. 11 is a graph showing a change in a cell gap relative to a temperature, regarding still another comparative example.

Fig. 12 is a plan view showing an irregular display color caused by a fluctuation of an ambient temperature, in a conventional liquid crystal display device.

Fig. 13 is a sectional view showing a cell gap which changes in accordance with a fluctuation of an ambient temperature, in the conventional liquid crystal display device.

Fig. 14 is a sectional view showing a cell gap which changes in accordance with a fluctuation of an ambient temperature, in another conventional liquid crystal display device.

DESCRIPTION OF THE EMBODIMENTS

Referring to Figs. 1 through 11, the following explanation describes one embodiment of the present invention.

Fig. 1 is a sectional drawing showing a liquid crystal display device of the present embodiment at room

temperature. As shown in Fig. 1, the liquid crystal display device of the present embodiment includes a pair of insulating substrates 1 which oppose each other, and display electrodes 2 and alignment films 3 which are disposed in order on the insulating substrates 1. The display electrode 2 is made of transparent ITO (indium tin oxide). In addition to the above members, the liquid crystal display device of the present invention can be provided with a color filter for providing a color display, a protection film, a smoothing film, an insulating film, and the like. Moreover, as for the display electrode 2, an opaque electrode or a reflective or polarizing electrode can be adopted. As for the insulating substrate 1, it is possible to adopt a thin glass substrate or plastic substrate with a thickness of 0.55 mm or less.

Further, a pair of the insulating substrates 1, on which the above thin films are formed, are bonded to each other via a sealing material disposed on a circumference of the insulating substrates 1. In the present embodiment, a thermosetting and one-pack epoxy sealing material is adopted as a sealing material 4.

Seal internal spacers (not shown) are disposed in the sealing material 4, and cell internal spacers (not shown) are disposed so as to be surrounded by the sealing material 4 and to form a gap between the insulating substrates 1.

Furthermore, liquid crystal 5 is filled into the gap so as to complete a liquid crystal layer.

Moreover, ball glass beads are adopted as the seal internal spacers, and plastic beads are adopted as the cell internal spacers. Unlike a glass fiber which has been conventionally used, the glass beads are balls, so that they do not vertically overlap one another. Therefore, a cell gap can be readily controlled. Further, plastic beads, which can flexibly transform, are used in the liquid crystal cell 6 so as to respond to a change in the shape of the liquid crystal cell 6.

Additionally, in order to prevent an irregular display color, that is caused by a difference in thermal expansion amounts of materials constituting the liquid crystal display device, at an upper limit of an operating temperature, a cell gap, which is a thickness of the liquid crystal layer, is gradually increased from the center to an end of the display area at room temperature, in a range that no irregular display color appears. In other words, a pair of the cone-shaped insulating substrates 1 are bonded to each other such that projecting surfaces of the substrates oppose each other.

In the liquid crystal display device which is formed in the above process, when the operating temperature is raised, the liquid crystal cell 6 expands due to a difference in

thermal expansion amounts between the sealing material 4 and the liquid crystal 5, as shown in Fig. 2(a). However, a cell gap of the liquid crystal cell 6 is formed so as to be smaller in the center of the display area at room temperature, so that it is possible to reduce a cell gap difference between the center and an end of the display area in the liquid crystal cell 6. Particularly, this arrangement is effective in an STN liquid crystal display device operating in a wide temperature range (-20 - 70°C).

After careful consideration, it is understood that when a cell gap fluctuates due to a change in an atmospheric temperature (temperature increase), in the case of a cell gap difference of 0.1 μm or more between the center of the liquid crystal cell 6 and a part around the sealing material 4 at a high temperature (70°C), an irregular display color appears; meanwhile, in the case of a cell gap difference of 0.05 μm or less, it is difficult to visually observe an irregular display color. In contrast, at room temperature (25°C), when a cell gap difference is 0.13 μm or more between the center of the liquid crystal cell 6 and a part around the sealing material 4, an irregular display color appears; meanwhile, when the difference is 0.08 μm or less, it is difficult to visually observe an irregular display color.

Therefore, it is found that in order to prevent an

irregular display color at a high temperature (70°C) and at room temperature (25°C), the liquid crystal cell 6 is formed such that the cell gap gradually increases from the center to an end of the display area at room temperature with a thickness of less than 0.13 μm , preferably 0.08 μm or less.

Such a liquid crystal display device is manufactured as follows: as shown in Fig. 3, the liquid crystal 5 is filled, and an inlet is sealed while a pressure is applied from upward and downward by pressurizers 7, which pressurize the liquid crystal cell 6 to form cones thereon. However, any other method can be adopted for manufacturing the device.

[EXAMPLE 1]

Firstly, referring to Fig. 1, the following explanation describes a liquid crystal display device of Example 1. As the insulating substrate 1, soda glass is adopted with an outer dimension of 34 mm \times 29 mm and a thickness of 0.4 mm. An epoxy resin is adopted for the sealing material 4. Many glass beads are mixed into the sealing material 4 as the seal internal spacers, and plastic beads are mixed into the liquid crystal cell 6 as the cell internal spacers.

In this case, as shown in Fig. 4, a cell gap is 5.70 μm in the center of the cell (center of the display area) and 5.75 μm (average value of measurement results at 20 points around the display area) around the seal (end of the display area) at 25°C. In the liquid crystal cell 6, a cell gap

gradually increases from the center to an end of the display area.

Fig. 4 shows measurement results of cell gap fluctuations relative to atmospheric temperature fluctuations, regarding the center and a part around the seal of the liquid crystal cell 6. The higher the atmospheric temperature is, the liquid crystal 5 expands further. The cell gap increases both in the center and around the seal. Fig. 2(a) is a sectional view of the liquid crystal cell 6 when an atmospheric temperature is 25°C (room temperature) and 70°C (high temperature).

Upon confirming the display of the liquid crystal display device of the Example 1, it is found that display properties are fully exhibited at room temperature and an irregular display color such as a color fading to white, that has been a problem conventionally, does not appear in the center of the cell at a high temperature.

[EXAMPLE 2]

A liquid crystal display device of Example 2 has the same construction as Example 1. As shown in Fig. 5, a cell gap is $5.65\mu\text{m}$ in the center of the cell (center of the display area) and $5.73\mu\text{m}$ (average value of measurement results at 20 points around the display area) around the seal (end of the display area) at 25°C. In the liquid crystal cell 6, the cell gap gradually increases from the

center to an end of the display area.

Fig. 5 shows measurement results of cell gap fluctuations relative to atmospheric temperature fluctuations, regarding the center and a part around the seal of the liquid crystal cell 6. The higher the atmospheric temperature is, the liquid crystal 5 expands further. The cell gap increases both in the center and around the seal. Fig. 2(b) is a sectional view of the liquid crystal cell 6 when an atmospheric temperature is 25°C (room temperature) and 70°C (high temperature).

Upon confirming the display of the liquid crystal display device of the Example 2, it is found that display properties are fully exhibited at room temperature and an irregular display color such as a color fading to white, that has been a problem conventionally, does not appear in the center of the cell at a high temperature.

[EXAMPLE 3]

A liquid crystal display device of Example 3 has the same construction as Example 1. As shown in Fig. 6, a cell gap is $5.70\mu\text{m}$ in the center of the cell (center of the display area) and $5.73\mu\text{m}$ (average value of measurement results at 20 points around the display area) around the seal (end of the display area) at 25°C. In the liquid crystal cell 6, the cell gap gradually increases from the center to an end of the display area.

Fig. 6 shows measurement results of cell gap fluctuations relative to atmospheric temperature fluctuations, regarding the center and a part around the seal of the liquid crystal cell 6. The higher the atmospheric temperature is, the liquid crystal 5 expands further. The cell gap increases both in the center and around the seal.

Upon confirming the display of the liquid crystal display device of the Example 3, it is found that display properties are fully exhibited at room temperature and an irregular display color such as a color fading to white, that has been a problem conventionally, does not appear in the center of the cell at a high temperature.

[EXAMPLE 4]

A liquid crystal display device of Example 4 has the same construction as Example 1, and the insulating substrate 1 is made of soda glass with a thickness of 0.55mm. As shown in Fig. 7, a cell gap is $5.68\mu\text{m}$ in the center of the cell (center of the display area) and $5.72\mu\text{m}$ (average value of measurement results at 20 points around the display area) around the seal (end of the display area) at 25°C . In the liquid crystal cell 6, the cell gap gradually increases from the center to an end of the display area.

Fig. 7 shows measurement results of cell gap fluctuations relative to atmospheric temperature

fluctuations, regarding the center and a part around the seal of the liquid crystal cell 6. The higher the atmospheric temperature is, the liquid crystal 5 expands further. The cell gap increases both in the center and around the seal.

Upon confirming the display of the liquid crystal display device of the Example 4, it is found that display properties are fully exhibited at room temperature and an irregular display color such as a color fading to white, that has been a problem conventionally, does not appear in the center of the cell at a high temperature.

[COMPARATIVE EXAMPLE 1]

A liquid crystal display device of Comparative Example 1 has the same construction as Example 1. As shown in Fig. 8, a cell gap is $5.71\mu\text{m}$ in the center of the cell (center of the display area) and $5.71\mu\text{m}$ (average value of measurement results at 20 points around the display area) around the seal (end of the display area) at 25°C . In the liquid crystal cell 6, an even cell gap is maintained from the center to an end of the display area.

Fig. 8 shows measurement results of cell gap fluctuations relative to atmospheric temperature fluctuations, regarding the center and a part around the seal of the liquid crystal cell 6. The higher the atmospheric temperature is, the liquid crystal 5 expands

further. The cell gap increases both in the center and around the seal. Fig. 2(c) is a sectional view of the liquid crystal cell 6 when an atmospheric temperature is 25°C (room temperature) and 70°C (high temperature).

Upon confirming the display of the liquid crystal display device of Comparative Example 1, it is found that display properties are fully exhibited at room temperature. However, an irregular display color such as a color fading to white, that has been a problem conventionally, appears in the center of the cell.

[COMPARATIVE EXAMPLE 2]

A liquid crystal display device of Comparative Example 2 has the same construction as Example 1. As shown in Fig. 2(d), a cell gap is $5.68\mu\text{m}$ in the center of the cell (center of the display area) and $5.74\mu\text{m}$ (average value of measurement results at 20 points around the display area) around the seal (end of the display area) at 25°C. In the liquid crystal cell 6, an even cell gap is maintained in the center of the display area, and the cell gap increases merely in an end of the display area.

Fig. 8 shows measurement results of cell gap fluctuations relative to atmospheric temperature fluctuations, regarding the center and a part around the seal of the liquid crystal cell 6. The higher the atmospheric temperature is, the liquid crystal 5 expands

further. The cell gap increases both in the center and around the seal. Fig. 2(d) is a sectional view of the liquid crystal cell 6 when an atmospheric temperature is 25°C (room temperature) and 70°C (high temperature).

Upon confirming the display of the liquid crystal display device of Comparative Example 2, it is found that display properties are fully exhibited at room temperature. However, an irregular display color such as a color fading to white, that has been a problem conventionally, appears in the center of the cell.

[COMPARATIVE EXAMPLE 3]

A liquid crystal display device of Comparative Example 3 has the same construction as Example 1 and the insulating substrate 1 is made of soda glass with a thickness of 0.6mm. As shown in Fig. 10, a cell gap is 5.73 μ m in the center of the cell (center of the display area) and 5.73 μ m (average value of measurement results at 20 points around the display area) around the seal (end of the display area) at 25°C. In the liquid crystal cell 6, an even cell gap is maintained from the center to an end of the display area.

Fig. 10 shows measurement results of cell gap fluctuations relative to atmospheric temperature fluctuations, regarding the center and a part around the seal of the liquid crystal cell 6. The higher the atmospheric temperature is, the liquid crystal 5 expands

further. The cell gap increases both in the center and around the seal. Fig. 2(e) is a sectional view of the liquid crystal cell 6 when an atmospheric temperature is 25°C (room temperature) and 70°C (high temperature).

Upon confirming the display of the liquid crystal display device of Comparative Example 3, it is found that display properties are fully exhibited at room temperature, and an irregular display color such as a color fading to white, that has been a problem conventionally, appears in the center of the cell; however, the irregular display color is hardly confirmed by visual observation.

This is probably because soda glass, which is adopted as the insulating substrate 1 with a thickness of 0.6mm, maintains a cell gap with a force being larger than a cell gap fluctuation, which is caused by a difference in thermal expansion amounts between the liquid crystal 5 and the sealing material 4.

In Comparative Example 3, an irregular display color at 70°C (high temperature) is hardly confirmed by visual observation. Further, when the present invention is applied to a liquid crystal display device in which soda glass is adopted as the insulating substrate 1 with a thickness of 0.6mm, the display quality can be improved.

[COMPARATIVE EXAMPLE 4]

A liquid crystal display device of Comparative Example

4 has the same construction as Example 1 and the insulating substrate 1 is made of soda glass with a thickness of 0.55mm. As shown in Fig. 11, in the liquid crystal display device of Comparative Example 4, a cell gap is $5.74\mu\text{m}$ in the center of the cell (center of the display area) and $5.74\mu\text{m}$ (average value of measurement results at 20 points around the display area) around the seal (end of the display area) at 25°C . In the liquid crystal cell 6, an even cell gap is maintained from the center to an end of the display area.

Fig. 11 shows measurement results of cell gap fluctuations relative to atmospheric temperature fluctuations, regarding the center and a part around the seal of the liquid crystal cell 6. The higher the atmospheric temperature is, the liquid crystal 5 expands further. The cell gap increases both in the center and around the seal.

Upon confirming the display of the liquid crystal display device of Comparative Example 4, it is found that display properties are fully exhibited at room temperature. However, an irregular display color such as a color fading to white, that has been a problem conventionally, appears in the center of the cell.

Here, Table 2 shows cell gaps between the center of the cell and a part around the seal, and (cell gaps in the center of the cell) - (cell gaps around the seal), regarding

Examples 1 through 4 and Comparative Examples 1 through 4.

[Table 2]

	TEMPERATURE/°C	-20	0	25	50	70
EXAMPLE 1	CENTER OF CELL	5.08	5.32	5.70	5.97	6.17
	AROUND SEAL	5.13	5.36	5.75	6.00	6.12
	CELL GAP DIFFERENCE	-0.05	-0.04	-0.05	-0.03	0.05
EXAMPLE 2	CENTER OF CELL	5.03	5.30	5.65	5.93	6.09
	AROUND SEAL	5.11	5.37	5.73	5.98	6.09
	CELL GAP DIFFERENCE	-0.08	-0.07	-0.08	-0.05	0.00
EXAMPLE 3	CENTER OF CELL	5.04	5.34	5.70	5.96	6.19
	AROUND SEAL	5.09	5.37	5.73	5.97	6.11
	CELL GAP DIFFERENCE	-0.05	-0.03	-0.03	-0.01	0.08
EXAMPLE 4	CENTER OF CELL	5.04	5.34	5.68	5.90	6.14
	AROUND SEAL	5.09	5.38	5.72	5.92	6.09
	CELL GAP DIFFERENCE	-0.05	-0.04	-0.04	-0.02	0.05
COMPARATIVE	CENTER OF CELL	5.09	5.36	5.71	6.02	6.22
EXAMPLE 1	AROUND SEAL	5.10	5.35	5.71	5.99	6.09
	CELL GAP DIFFERENCE	-0.01	0.01	0.00	0.03	0.13
COMPARATIVE	CENTER OF CELL	5.07	5.33	5.68	5.86	6.22
EXAMPLE 2	AROUND SEAL	5.14	5.39	5.74	5.94	6.10
	CELL GAP DIFFERENCE	-0.07	-0.06	-0.06	-0.08	0.12
COMPARATIVE	CENTER OF CELL	5.12	5.37	5.73	6.02	6.21
EXAMPLE 3	AROUND SEAL	5.13	5.37	5.73	6.01	6.12
	CELL GAP DIFFERENCE	-0.01	0.00	0.00	0.01	0.09
COMPARATIVE	CENTER OF CELL	5.11	5.38	5.74	6.01	6.22
EXAMPLE 4	AROUND SEAL	5.12	5.39	5.74	5.99	6.11
	CELL GAP DIFFERENCE	-0.01	-0.01	0.00	0.02	0.11

The above explanation describes the liquid crystal display device of the present invention. Upon manufacturing the liquid crystal display device, the cell gaps are

irregular around the seal. Thus, in the present comparative example, regarding 20 points around the seal, an average value of the cell gaps is found and used for consideration. Besides this method, it is possible to compare (a) an average value of cell gaps around the seal of each side with (b) a cell gap in the center of the cell, before consideration. Here, in the present comparative example, an irregular display color caused by a partial cell gap difference is excluded before consideration.

As described above, a first liquid crystal display device of the present invention, in which a pair of insulating substrates are bonded to each other via a sealing material and liquid crystal is filled between a pair of the insulating substrates, is characterized in that a cell gap is formed so as to gradually increase from the center to an end of a display area at room temperature.

According to the above arrangement, the cell gap is formed so as to gradually increase from the center to an end of the display area at room temperature in a range that no irregular display color appears. Hence, it is possible to smooth out a difference in thermal expansions between the liquid crystal and the sealing material when an atmospheric temperature rises, and it is possible to prevent a cell gap from being too large in the center of the display area. Consequently, an irregular display color can be eliminated.

The liquid crystal display device of the present invention is effectively used for an STN liquid crystal display device, in which an operating temperature ranges from room temperature to a high temperature. Particularly, the aforementioned problem frequently appears at a high temperature. Therefore, a cell gap is formed so as to gradually increase from the center to an end of the display area at room temperature in a range that no irregular display color appears, so that it is possible to smooth out a difference in thermal expansion amounts between the liquid crystal and the sealing material at a high temperature. Consequently, an irregular display color can be prevented at a high temperature.

Here, in the present invention, a high temperature is, for example, an atmospheric temperature of about 60 to 70°C, and room temperature is an atmospheric temperature of about 25°C.

With the arrangement of the first liquid crystal display device, a second liquid crystal display device of the present invention is characterized in that in the display area, a cell gap is smaller in the center by less than 0.13 μ m than an average value of cell gaps on an end at room temperature. Hence, it is possible to prevent an irregular display color recognized as a defect at room temperature and at a high temperature.

With the arrangement of the second liquid crystal display device, a third liquid crystal display device of the present invention is characterized in that in the display area, a cell gap is smaller in the center by $0.08\mu\text{m}$ or less than an average value of cell gaps on an end at room temperature.

With the above arrangement, in the display area, a cell gap is smaller in the center by $0.08\mu\text{m}$ or less than an average value of cell gaps on an end at room temperature, so that it is possible to prevent an irregular display color at room temperature and at a high temperature.

With the arrangements of the first through third liquid crystal display devices, a fourth liquid crystal display device of the present invention is characterized in that a cell gap is formed so as to gradually increase from the center to an end of the display area at room temperature, and a cell gap is formed so as to gradually decrease from the center to an end of the display area at a high temperature.

With the above arrangement, a cell gap is formed so as to gradually increase from the center to an end of the display area at room temperature, and a cell gap is formed so as to gradually decrease from the center to an end of the display area at a high temperature. Namely, a cell gap gradually decreases from the center to an end of the display

area at a high temperature so as to reduce a cell gap difference between the center and an end of the display area at room temperature. Thus, it is possible to achieve a more even display.

With the arrangements of the first through fourth liquid crystal display devices, a fifth liquid crystal display device of the present invention is characterized in that the insulating substrate is a glass substrate or a plastic substrate with a thickness of 0.55mm or less.

With the above arrangement, even when a glass substrate or a plastic substrate is used as the insulating substrate with a thickness of 0.55mm or less, that tends to cause an irregular display color due to a large influence of thermal expansion, an irregular display color can be prevented at a high temperature.

The invention being thus described, it will be obvious that the same may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of the invention, and all such modifications as would be obvious to one skilled in the art are intended to be included within the scope of the following claims.

WHAT IS CLAIMED IS:

1. A liquid crystal display device, comprising:

a pair of insulating substrates bonded via a sealing material, and

liquid crystal filled between a pair of said insulating substrates,

wherein a cell gap is formed so as to gradually increase from a center to an end of a display area at room temperature.

2. A liquid crystal display device, comprising:

a pair of insulating substrates bonded via a sealing material, and

liquid crystal filled between a pair of said insulating substrates,

wherein a cell gap is formed so as to gradually increase from a center to an end of a display area at room temperature in a range that no irregular display color appears, so that it is possible to smooth out a difference in thermal expansion amounts between said liquid crystal and said sealing material at a high temperature.

3. The liquid crystal display device as defined in claim 1, wherein in said display area, a cell gap is smaller in the center by less than $0.13\mu\text{m}$ than an average value of

cell gaps on an end at room temperature.

4. The liquid crystal display device as defined in claim 1, wherein in said display area, a cell gap is smaller in the center by $0.08\mu\text{m}$ or less than an average value of cell gaps on an end at room temperature.

5. The liquid crystal display device as defined in claim 1, wherein a cell gap is formed so as to gradually increase from the center to an end of said display area at room temperature, and a cell gap is formed so as to gradually decrease from the center to the end of said display area at a high temperature.

6. The liquid crystal display device as defined in claim 3, wherein a cell gap is formed so as to gradually increase from the center to an end of said display area at room temperature, and a cell gap is formed so as to gradually decrease from the center to the end of said display area at a high temperature.

7. The liquid crystal display device as defined in claim 4, wherein a cell gap is formed so as to gradually increase from the center to an end of said display area at room temperature, and a cell gap is formed so as to

gradually decrease from the center to the end of said display area at a high temperature.

8. The liquid crystal display device as defined in claim 1, wherein each of a pair of said insulating substrates is a glass substrate having a thickness of 0.55mm or less.

9. The liquid crystal display device as defined in claim 1, wherein each of a pair of said insulating substrates is a plastic substrate having a thickness of 0.55mm or less.

10. The liquid crystal display device as defined in claim 1, wherein said liquid crystal display device is an STN liquid crystal display device.

11. The liquid crystal display device as defined in claim 10, wherein an operating temperature ranges virtually between -20°C and 70°C.

12. A liquid crystal display device, comprising:
a pair of insulating substrates bonded via a sealing material, and
liquid crystal filled between a pair of said insulating


substrates,

wherein a cell gap is smaller in a center than any other part of a display area at room temperature such that a cell gap difference is set at a predetermined amount between the center and an end of said display area at a high temperature in a range that no display defect occurs.

ABSTRACT OF THE DISCLOSURE

A liquid crystal display device includes a pair of insulating substrates bonded to each other via a sealing material, and liquid crystal filled between a pair of the insulating substrates. A cell gap is formed so as to gradually increase from the center to an end of a display area at room temperature. According to this arrangement, it is possible to smooth out a difference in thermal expansion between the liquid crystal and the sealing material when an atmospheric temperature rises, and it is possible to prevent a cell gap from being too large in the center of the display area. Consequently, an irregular display color can be eliminated.

FIG.1

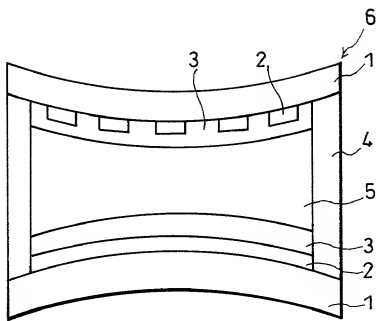

AT ROOM TEMPERATURE

AT HIGH TEMPERATURE




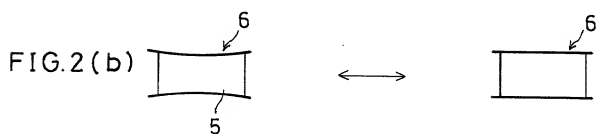



FIG. 3

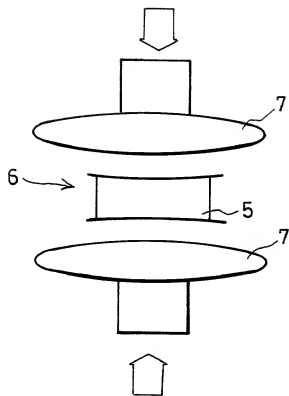


FIG.4

CELL GAP CHANGE RELATIVE
TO TEMPERATURE
(EXAMPLE 1)

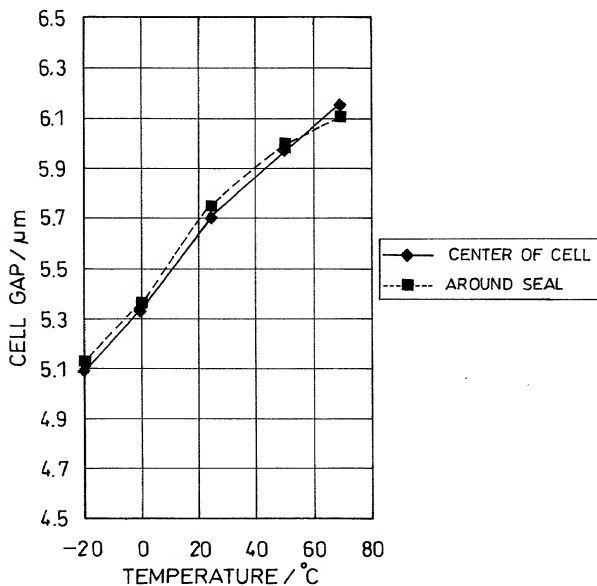


FIG. 5

CELL GAP CHANGE RELATIVE
TO TEMPERATURE
(EXAMPLE 2)

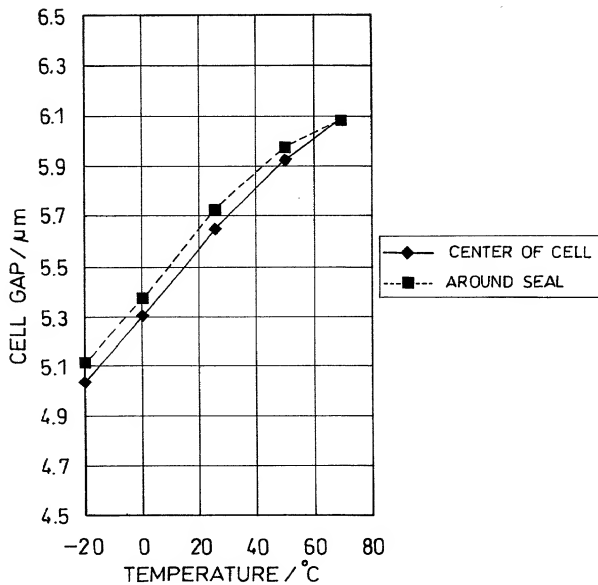


FIG. 6

CELL GAP CHANGE RELATIVE
TO TEMPERATURE
(EXAMPLE 3)

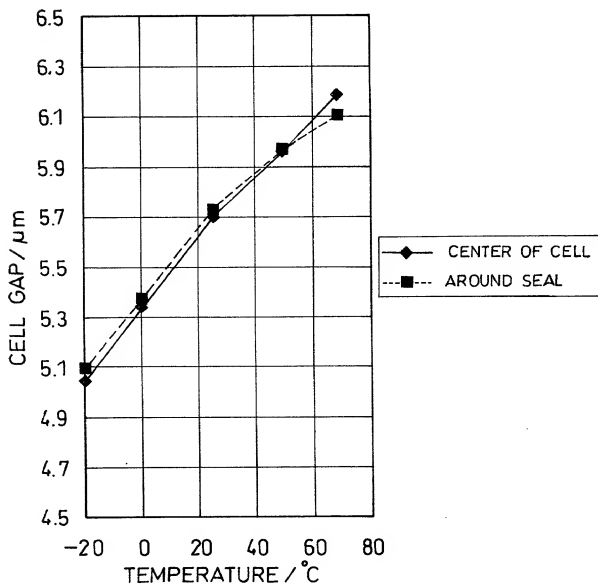


FIG.7

CELL GAP CHANGE RELATIVE
TO TEMPERATURE
(EXAMPLE 4)

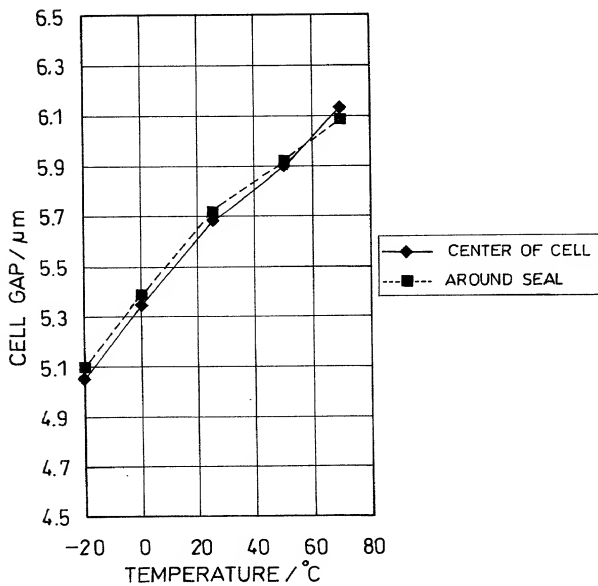


FIG.8

CELL GAP CHANGE RELATIVE
TO TEMPERATURE
(COMPARATIVE EXAMPLE 1)

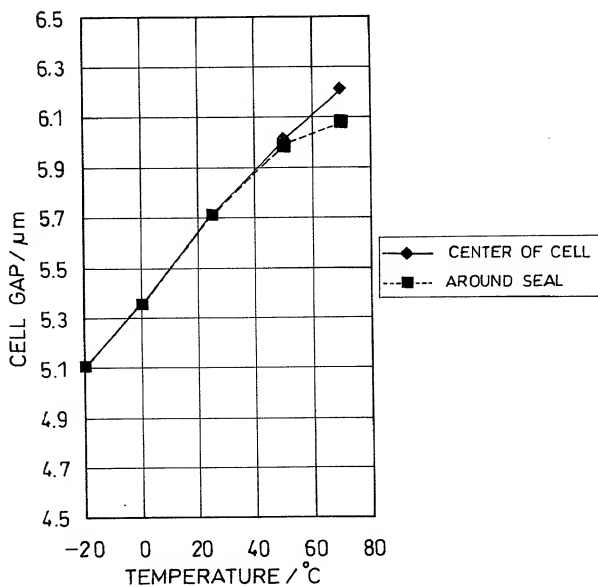


FIG. 9

CELL GAP CHANGE RELATIVE
TO TEMPERATURE
(COMPARATIVE EXAMPLE 2)

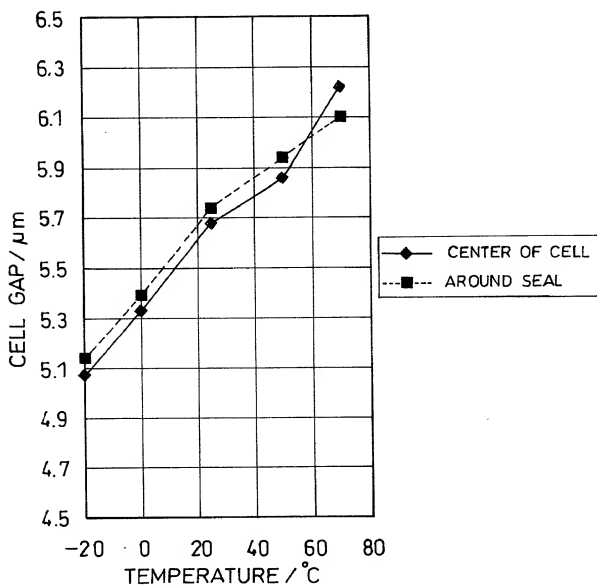


FIG.10

CELL GAP CHANGE RELATIVE
TO TEMPERATURE
(COMPARATIVE EXAMPLE 3)

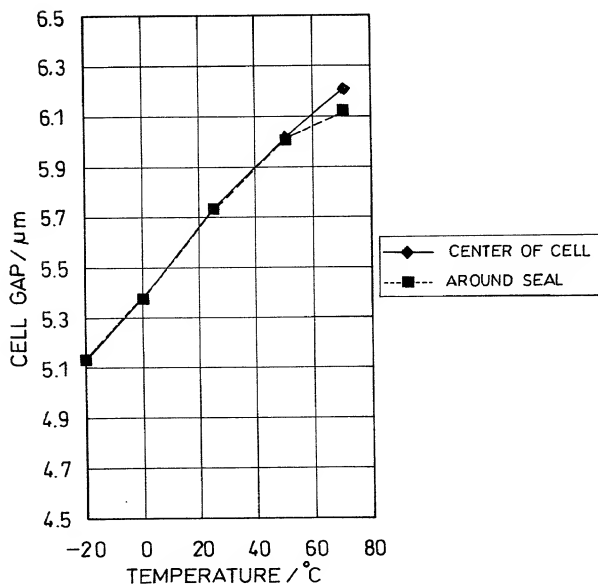


FIG. 11

CELL GAP CHANGE RELATIVE
TO TEMPERATURE
(COMPARATIVE EXAMPLE 4)


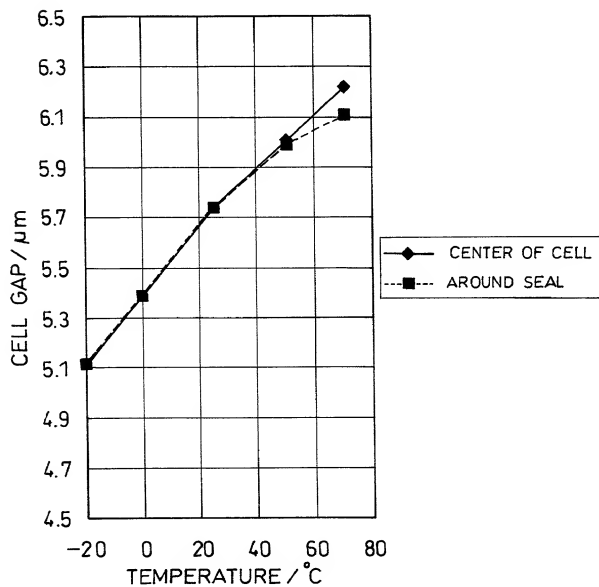


FIG. 12

AT ROOM TEMPERATURE




EVEN DISPLAY

AT HIGH TEMPERATURE




COLOR FADING

FIG.13



AT ROOM TEMPERATURE



AT HIGH TEMPERATURE

FIG.14

AT ROOM TEMPERATURE



AT HIGH TEMPERATURE



I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below, and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose material information as defined in 37 CFR §1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

Prior U.S. Applications or PCT International Applications Designating the U.S-Benefit Under 35 U.S.C. §120					
U.S. Applications			Status (Check One)		
Application Serial No.	U.S. Filing Date	Patented	Pending	Abandoned	
PCT Applications Designating the U.S.					
Application No.	Filing Date	U.S. Serial No. Assigned			

CLAIM FOR BENEFIT OF PRIOR U.S. PROVISIONAL APPLICATION(S)
(35 U.S.C. § 119(e))

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below:

Applicant	Provisional Application Number	Filing Date

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) with full powers of association, substitution and revocation to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Sewall P. Bronstein (Reg. No. 16,919)
David G. Corliss (Reg. No. 27,026)
George W. Neuner (Reg. No. 26,964)
Ernest V. Linek (Reg. No. 29,822)

Linda M. Buckley (Reg. No. 31,003)
Ronald I. Eisenstein (Reg. No. 30,628)
Henry D. Pahl, Jr. (Reg. No. 20,438)
Peter J. Manus (Reg. No. 26,766)

David S. Resnick (Reg. No. 34,235)
Peter F. Corliss (Reg. No. 33,860)

SEND CORRESPONDENCE TO: Dike, Bronstein, Roberts & Cushman, LLP 130 Water Street Boston, Massachusetts 02109	DIRECT TELEPHONE CALLS TO: (617) 523-3400
--	---

2 0 1	FULL NAME OF INVENTOR	LAST NAME	FIRST NAME	MIDDLE NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE OR COUNTRY AND ZIP CODE
		Noguchi	Takuya	
		Shiki-gun	Nara Japan	Japan
		868-A203, Chishiro Tawaramoto-cho	Shiki-gun	Nara 636-0246 Japan

2 0 2	FULL NAME OF INVENTOR	LAST NAME	FIRST NAME	MIDDLE NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE OR COUNTRY AND ZIP CODE
		Yoshimura	Kazuya	
		Kitakatsuragi-gun	Nara Japan	Japan
		1-1-3, Seiwadai Kawai-cho	Kitakatsuragi-gun	Nara 636-0081 Japan

2 0 3	FULL NAME OF INVENTOR	LAST NAME	FIRST NAME	MIDDLE NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE OR COUNTRY AND ZIP CODE

2 0 4	FULL NAME OF INVENTOR	LAST NAME	FIRST NAME	MIDDLE NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE OR COUNTRY AND ZIP CODE

2 0 5	FULL NAME OF INVENTOR	LAST NAME	FIRST NAME	MIDDLE NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE OR COUNTRY AND ZIP CODE

2 0 6	FULL NAME OF INVENTOR	LAST NAME	FIRST NAME	MIDDLE NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE OR COUNTRY AND ZIP CODE

2 0 7	FULL NAME OF INVENTOR	LAST NAME	FIRST NAME	MIDDLE NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE OR COUNTRY AND ZIP CODE

2 0 8	FULL NAME OF INVENTOR	LAST NAME	FIRST NAME	MIDDLE NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE OR COUNTRY AND ZIP CODE

I hereby further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Signature of Inventor 201 <i>Takuya noguchi</i>	Signature of Inventor 202 <i>Kazuya Yoshimura</i>
Date: January 11, 2000	Date: January 11, 2000